

Section 3

Blow Guns, Water Guns, Hose Reels and Tool Balancers

	<u>Page No</u>
208 Series Blow Guns - Standard	128
208 Series Blow Guns - Safety	128
208 Series Blow Guns - Star-tip	129
208 Series Blow Guns - Accessories	129
207 Series Blow Guns	130
Metal Safety Blow Guns	131
Vacuum / Blow Guns	132
Hose & Blow Gun Accessories	133
Rubber & Metal Water Guns NEW	134
Free Angle Fittings	135
Tool Balancers	136
CEJN Hose & Cable Reels	137
Redashe Hose Reels NEW	138 - 142

Section 3



- Easy connection with a well designed hold
- The finger grip gives good steering and a "finger tip feel" when used in low power blowing
- Ergonomically designed for comfortable handling
- Suspension possible by both the built-in hook and the handle
- The normal grip is adjusted to fit the hand during normal usage
- Extremely durable acetaplastic that also isolates against cold media
- Infinitely variable airflow with high blowing force for efficient cleaning



Specifications

Airflow at inlet pressure of 6 bar (87 PSI) 500 l/m (18 CFM)
 Max. working pressure 16 bar (232 PSI)
 Temperature range -20°C to +60°C (-4°F to +140°F)


CEJN SERIES 208		THE STANDARD RANGE	
	PART NO.	DESCRIPTION	PRICE
11 208 0100 / 11 208 0200	11 208 0100	Blow Gun 90mm, Non-Removable	£ 9.60
11 208 0000	11 208 0000	Basic Blow Gun, No Nozzles Supplied	£ 8.70
	11 208 0200	Blow Gun 90mm, Removable	£10.10
	11 208 0215	90mm Tube (for use with 11 208 0000 / 11 208 0200)	£ 3.20
	11 208 0219	330mm Tube (for use with 11 208 0000 / 11 208 0200)	£11.75
	11 208 0220	500mm Tube (for use with 11 208 0000 / 11 208 0200)	£12.05
	11 208 0222	400mm Flexible Tube (for use with 11 208 0000 / 11 208 0200)	£17.90



CEJN SERIES 208 SAFETY BLOW GUN

Specifications

Airflow at inlet pressure of 6 bar (87 PSI) 250 l/m (9 CFM)
 Max. working pressure 8 bar (116 PSI)
 Temperature range -20°C to +60°C (-4°F to +140°F)
 Outlet pressure when dead ended 2 bar (29 PSI)

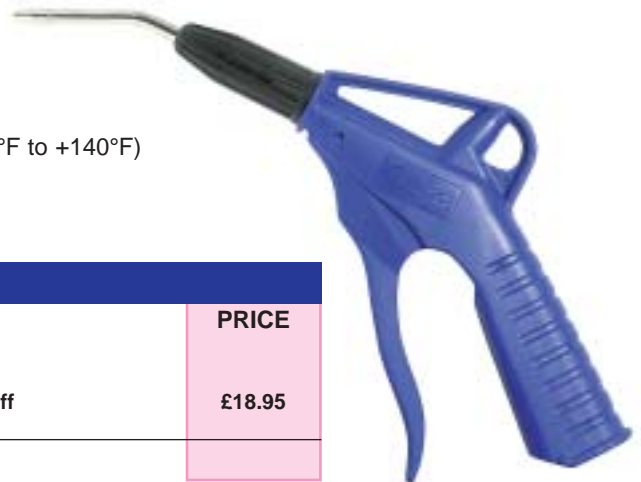

THE SAFETY RANGE

PART NO.	DESCRIPTION	PRICE
11 208 0300	Blow Gun 90mm, Automatic Shut-Off	£18.95



CEJN's Star-tip design has six separate outlets, which gives a silencing effect combined with a high blow force. Combining the integrated nozzle and bent tube make it easy to get to those hard to reach places. The Star-tip is optional on both fixed and exchangeable tubes as well as on the extension tubes.

- Built-in silencer tip ensures low noise level, 79 dBA
- Easy connection with a well designed hold
- The finger grip gives good steering and a "finger tip feel" when used in low power blowing
- Ergonomically designed for comfortable handling
- Suspension possible by both the built-in hook and the handle
- The normal grip is adjusted to fit the hand during normal usage
- Extremely durable acetaplastic that also isolates against cold media
- Infinitely variable airflow with high blowing force for efficient cleaning



Specifications

Airflow at inlet pressure of 6 bar (87 PSI)	190 l/m (7 CFM)
Sound level at 6 bar (87 PSI)	79 dBA
Max. working pressure	16 bar (232 PSI)
Temperature range	-20°C to +60°C (-4°F to +140°F)

CEJN SERIES 208		THE STANDARD RANGE	
	PART NO.	DESCRIPTION	PRICE
	11 208 3100	Star-tip Blow Gun 90mm, Non-Removable	£10.40
	11 208 3200	Star-tip Blow Gun 90mm, Removable	£11.20
	11 208 3215	90mm Tube, Star-tip (for use with 11 208 3200)	£ 5.45
	11 208 3219	330mm Tube, Star-tip (for use with 11 208 3200)	£13.25
	11 208 3220	500mm Tube, Star-tip (for use with 11 208 3200)	£14.35

CEJN SERIES 208		ACCESSORIES	
	PART NO.	DESCRIPTION	PRICE
	11 208 9951	By-pass Non Removable	£ 6.70
	11 208 9953	Venturi Non Removable	£ 5.75
	11 208 9954	Air Curtain Removable	£ 6.70
	11 208 9955	Chip Shield	£ 3.85
	11 208 9956	14mm Rubber Tip Removable	£ 4.80
	11 208 9957	25mm Rubber Tip Removable	£ 5.45
	11 208 9968	35mm Rubber Tip Removable (not shown)	£ 6.00
	11 208 9960	3 Piece Rubber Tip Kit Removable (not shown)	£16.80



- Built-in silencer
- Compact and lightweight design
- Ergonomical
- Adjustable power
- Changeable nozzles




SPECIFICATIONS

Working pressure	4 to 16 Bar (58 to 232 PSI)
Max. air flow	350 l/min (12.3 C.F.M.)
Noise level	84 dBA
Temperature range	-40°C to +60°C (-40°F to +140°F)
Material	POM



CEJN SERIES 207

BLOW GUN

	PART NO.	DESCRIPTION	INLET	PRICE
	11-207-3100	Blow gun c/w Standard nozzle with Silencer	1/4" BSP	£ 7.60

CEJN SERIES 207 ACCESSORIES

NOZZLES

	PART NO.	DESCRIPTION	PRICE
	11-207-9956	Rubber nozzle	£ 3.80
	11-207-9960	Replacement Standard nozzle with Silencer	£ 1.60



BLOW GUN FEATURES

- Flow stabiliser valve for precise air control
- Contoured design to comfortably fit operator's hand
- Chrome plated, lightweight zinc body
- Cushioned thumb lever
- Large hanging hook



“S” in the part number denotes safety models meeting OSHA spec 1910.95 for noise level and 1910.242B where outlet pressure is less than 30 PSI when dead-ended

METAL SAFETY BLOW GUNS

	PART NO.	DESCRIPTION	PRICE
	600SDL	Standard Safety Gun • Tamper-proof vent holes increase total air flow • One piece, die cast construction • Industrial and automotive • Shops where increased air flow is required • General purpose gun for blowing away dust, metal chips, wood chips, etc.	£ 7.74
	600STD	Tamper-Proof Gun	£ 8.52
	601	Rubber Tip Gun	£ 8.56
	600SS	Safety Shield Gun • Brass air screen tip produces conical air stream around centre air stream • Minimises blow-back of chips or particles • Machine, tool and die and woodworking shops where drilled or tapped blind holes must be blown out causing chip and particle blow-back	£11.59

BASIC GUN MEETS OSHA REQUIREMENTS WHEN USED WITH SAFETY TIPS BELOW

	600NT1W	Basic Gun	£ 6.60
	ST12	Safety Shield	£ 6.18
	SAT13	Rubber Tip	£ 3.46
	ST206	Straight Safety Extension 6"	£ 6.35
	ST212	Straight Safety Extension 12"	£ 8.86
	ST218	Straight Safety Extension 18"	£12.41
	STFF06	Safety Flexible Extension 6"	£ 9.12

BLOW GUN

	PART NO.	DESCRIPTION	PRICE
	BG605	Blow Gun with Nozzle and Additional Safety Shield Nozzle	£ 5.50



Every production plant produces waste material, both wet and dry. The exceptional efficiency of these products is due to its design incorporating a scientifically developed series of angled jets creating a spiral vortex which produces a very efficient venturi effect.

Air Powered Vacuum / Blow System

- Air throughput increases by 7 times
- Gun nylon with safety trigger
- Hand held and fixed options
- Blow or vacuum
- No moving parts
- Only low pressure ejected

APPLICATIONS - Collection and Conveying of:- (Hand Held or Fixed)

- Food Products
- Metal objects
- Dusts
- Plastic pellets
- Swarf
- Powders
- Filings
- Grains








*Connect to any air supply of 60 PSI / 8 CFM - or more.

SAFETY - We recommend that dry filtered compressed air and appropriate safety equipment is used with this product. **SEE SECTION 4 FOR FRL's**

*For optimum performance the air feed line should be at least 3/8" ID bore.



NOTE! - NOT SUITABLE FOR FLAMMABLE OR VOLATILE SUBSTANCES

VACUUM / BLOW GUNS			
	PART NO.	DESCRIPTION	PRICE
	VM 22	Air gun	£31.20
	VM AP 22	Air pump gun	£40.45
	VM 22 DH	Deep hole gun removes chips from blind holes up to 450 mm deep.	£47.35
	VM 22-1	DUST BAG KIT C/W Clip & Crevice Nozzle	£17.90
	VM 22-3	EXTENSION TUBE can be coupled to extend reach	£ 6.05
	VM 22-5	CREVICE NOZZLE	£ 4.80
	VM 22-6	ROUND BRUSH 60 mm diameter	£ 6.05
	VM 22-4	CONVEYING HOSE 1mtr length	£ 3.55

SPECIFICATIONS						
PART NO.	CFM @ 60 PSI		CFM @ 100 PSI		AIR INLET SIZE	CONVEYING HOSE ID BORE
	IN	OUT	IN	OUT		
VM 22	9	54	14.5	101.5	1/4" BSPT male	32 mm
VM AP 22	9	54	14.5	101.5	1/4" compression fitting	32 mm

STREAMLINE BRAIDED POLYURETHANE HOSE WITH 320 SERIES NIPPLE AND 208 SERIES BLOWGUN


PART NO.	TUBE SIZE (mm)		HOSE LENGTH METRES	PRICE
	ID	OD		
TPDB-05	6.5	10.0	5	£33.35
TPDB-10	6.5	10.0	10	£47.50
TPDB-15	6.5	10.0	15	£61.70
TPDB-58	8.0	12.0	5	£40.30
TPDB-108	8.0	12.0	10	£59.20

FOR COUPLINGS SEE PAGE 20

STREAMLINE BRAIDED POLYURETHANE HOSE WITH 320 SERIES COUPLING AND NIPPLE


PART NO.	TUBE SIZE (mm)		HOSE LENGTH METRES	PRICE
	ID	OD		
TPDC-56	6.5	10.0	5	£30.60
TPDC-106	6.5	10.0	10	£44.75
TPDC-10	6.5	10.0	5	£37.05
TPDC-15	8.0	12.0	10	£55.95

FOR BLOW GUNS SEE PAGES 128 - 129

STREAMLINE POLYURETHANE RECOIL WITH 320 SERIES NIPPLE AND 208 SERIES BLOWGUN


PART NO.	TUBE SIZE (mm)		HOSE LENGTH METRES	PRICE
	ID	OD		
TPDB-02	6.5	10.0	2	£26.65
TPDB-04	6.5	10.0	4	£33.68
TPDB-06	6.5	10.0	6	£40.61
TPDB-28	8.0	12.0	2	£32.40
TPDB-48	8.0	12.0	4	£42.38

FOR COUPLINGS SEE PAGE 20

STREAMLINE POLYURETHANE RECOIL WITH 320 SERIES COUPLING AND NIPPLE


PART NO.	TUBE SIZE (mm)		HOSE LENGTH METRES	PRICE
	ID	OD		
TPDC-26	6.5	10.0	2	£23.65
TPDC-46	6.5	10.0	4	£30.68
TPDC-02	8.0	12.0	2	£28.47
TPDC-04	8.0	12.0	4	£38.47
TPDC-06	8.0	12.0	6	£48.60

FOR BLOW GUNS SEE PAGES 128 - 129



- Self closing - with water flow regulator
- Reduces water consumption
- Instantly adjustable spray pattern
- Heavy duty rubber cover prevents damage and insulates against high temperatures
- Watertight - can be used inside or outside
- Quick coupling
- Caustic and fat resistant
- Water pressure up to 215 PSI
- Temperature up to 80°C



LOW PRESSURE WATER GUN - SELF CLOSING



PART NO.	THREAD SIZE	PRICE
WG-2	1/2" BSPP	£66.00

The RI-JAC is an all metal water hose gun of sturdy construction which is simply set and fixed for various uses from spray to full jet. The RI-JAC is infinitely variable and easily lockable. Release of handle provides instant shutoff.

MATERIALS

Body, Hose Adaptor
 Adaptor, Spindle Tip & Gland Washers
 Rubber Buffer
 Handle & Pin Circlip
 'C' Washer, Spring
 Handle Pin, Spindle
 Triangular Washer
 Hexagon & Knurled Nuts
 Nylock Nut

Aluminium
 Rubber
 Rubber
 Stainless Steel
 Stainless Steel
 Brass
 Brass
 Brass
 Nylon



RI-JAC ALL METAL WATER HOSE GUN



PART NO.	DESCRIPTION	PRICE
RJET1	Ri-Jac Water Gun	£11.89

This unique fitting design was developed primarily for air tools in assembly line applications. Operators of air powered tools run much increased risk of cumulative trauma disorder (CTD) due to repetitive motion, vibration and pressure caused by the weight of the tool and supply hose.

By incorporating 360 degree circular and 45 degree angled rotation, the Free-Angle Fitting provides these features for air tool operators.

MAIN FEATURES

- Greatly reduces the incidence of repetitive strain injuries such as carpal tunnel syndrome and back stress
- Lightweight and streamline design
- Two rotation points prevent kinking of the supply hose
- Steel construction for maximum service life
- Rotating joint is supplied with polyurethane dust cover
- **Full 7mm flow**

APPLICATIONS

- Assembly operations in the automotive and electronic industries and spray painting
- Mechanical joints for robotics





SPECIFICATIONS

Medium
Compressed Air
Working Temperature
-5°C to +60°C (23°F to 140°F)
Max. Working Pressure
1Mpa (10.2Kgf/cm²) • 145PSI

MATERIALS

Main Body	Nickel-plated Steel
Shaft	Nickel-plated Steel
Ball	Nickel-plated Steel
Packing	NBR
Centre Cover	Nickel-plated Steel
Seal (O-Ring)	NBR



PNEUMATIC FREE ANGLE FITTINGS			
	PART NO.	DESCRIPTION	PRICE
	3FA2M-2M	1/4" BSPT MALE x 1/4" BSPT MALE	£20.95
	3FA2F-2M	1/4" BSP FEMALE x 1/4" BSPT MALE	£19.80
	3FAP2M320	CEJN 320 NIPPLE x 1/4" BSPT MALE	£20.55
	3FAP3M320	CEJN 320 NIPPLE x 3/8" BSPT MALE	£21.40



PARKAIR tool balancers enable all types of portable tools weighing up to 24kg (52.80lbs) to be suspended within easy reach of the operator. They provide the operator with a neat, safe work area and reduce worker fatigue. In addition they prevent damage to the tools by eliminating accidental dropping of the suspended tools.

TOOL BALANCERS



PART NO.	DESCRIPTION	PRICE
TB 0.5X1.0K	Balancing Capacity: 0.5 - 1.5kg (1.10 - 3.30lb) Length of cable: 2.50m (8.19ft)	£34.57
TB 0.5X1.5K	Balancing Capacity: 0.5 - 1.5kg (1.10 - 3.30lb) Length of cable: 2.50m (8.19ft)	£34.57
TB 1.0X2.0K	Balancing Capacity: 1 - 2kg (2.20 - 4.40lb) Length of cable: 2.50m (8.19ft)	£34.57
TB 2.0X3.5K	Balancing Capacity: 2 - 3.5kg (4.40 - 7.70lb) Length of cable: 2.50m (8.19ft)	£34.57
TB 3.0X6.0K	Balancing Capacity: 3 - 6kg (6.60 - 13.21lb) Length of cable: 2.50m (8.19ft)	£53.59
TB 5.0X8.5K	Balancing Capacity: 5 - 8.5kg (11 - 18.72lb) Length of cable: 2.50m (8.19ft)	£53.59
TB 8.0X11K	Balancing Capacity: 8 - 11kg (17.62 - 24.23lb) Length of cable: 2.50m (8.19ft)	£53.59

TOOL BALANCERS



LIGHT DUTY



HEAVY DUTY

PART NO.	DESCRIPTION	PRICE
LIGHT DUTY		
93050	Steel reinforced aluminium case Limit stop and shock absorber Push-button tension release Braided nylon cord Range: 0-5 Lbs	£40.48
HEAVY DUTY		
93100	Nylon coated steel aircraft cable Limit stop and shock absorber Permanently lubricated Steel case Range: 5-10 Lbs	£79.98
CABLE		
93070	Steel Cable Range: 0-5 Lbs	£39.04

CEJN hose and cable reels keep the workshop floor hose/cable free which helps ensure a safer working environment as well as protecting the hose/cable from dust and dirt.

FEATURES

- Keeps the workshop floor hose/cable free
- Safer working environment
- Protects hoses from dust and dirt
- Avoids abrasion of hoses
- Spring adjustable from the outside
- Oil and dirt resistant
- Can be mounted on a wall or ceiling
- Minimum pull resistance
- Kink free flexible hose
- High airflow for full power of the tool



CEJN HOSE REELS



PART NO.	CONNECTION	LENGTH	WORKING PRESSURE	DIMENSION	DIA.	PRICE
<i>FOR COMPRESSED AIR c/w 1/2 metre inlet supply hose</i>						
19 911 5000	1/4" Male	10 mtr	16 bar	8.0 x 12.0 mm	340 mm	£161.20
19 911 5100	1/4" Male	16 mtr	16 bar	8.0 x 12.0 mm	430 mm	£220.95
19 911 5120	1/4" Male	14 mtr	12 bar	9.5 x 13.5 mm	430 mm	£230.20
19 911 5130	1/2" Male	10 mtr	12 bar	11.0 x 16.0 mm	430 mm	£244.10
<i>FOR COMPRESSED AIR without inlet supply hose</i>						
19 911 5010	1/4" Male	9 mtr	16 bar	6.5 x 10.0 mm	330 mm	£144.00
19 911 5020	1/4" Male	7 mtr	16 bar	8.0 x 12.0 mm	330 mm	£144.00
<i>INLET SUPPLY HOSE FOR MODELS 5010 & 5020</i>						
19 958 9687	1/4" Male	1 mtr	16 bar	6.5 x 10.0 mm	-	£12.25
19 958 9688	1/4" Male	3 mtr	16 bar	6.5 x 10.0 mm	-	£17.10
19 958 9690	1/4" Male	1 mtr	16 bar	8.0 x 12.0 mm	-	£15.80
19 958 9691	1/4" Male	3 mtr	16 bar	8.0 x 12.0 mm	-	£22.30
<i>(The above hoses can also be used on the 5000 & 5100 models, if longer supply hose is required)</i>						
<i>FOR WATER</i>						
19 911 5140	1/4" Male	14 mtr	9 bar	9.5 x 13.5 mm	430 mm	£230.20

CEJN CABLE REELS



PART NO.	VOLTAGE	CURRENT	LENGTH	DIMENSION	DIA.	PRICE
<i>CABLE REELS</i>						
19 911 5050	230 volt	16 amp	10 mtr	3 x 1.5 mm ²	330 mm	£132.00
19 911 5150	230 volt	16 amp	17 mtr	3 x 1.5 mm ²	430 mm	£205.10



REDASHE WARRANTY DETAILS

All products supplied by Redashe are warranted from 1 to 5 years depending on manufacturer. If within the warranty period any such product is proved, to the satisfaction of Redashe, to be defective the product shall be repaired or replaced at the discretion of Redashe without charge. No responsibility is assumed for improper choice of models or where products are used in excess of their rated capacities and design functions. All hose supplied by Redashe is sourced from reliable commercial sources and is recommended for use on the basis of data supplied by the manufacturer. Redashe assumes no responsibility for any other application or use. Hose supplied by Redashe carries the warranty as listed by the manufacturer. A flexible connection must be used between the hose reel and supply. Use of a solid connection will void the swivel warranty.



Redashe has a policy of maintaining and promoting its reputation with its distributors and customers for quality, promptness and an economic price for products supplied. This policy is supported by a Company quality system developed by the management team at Redashe which meets the requirements of BS EN ISO 9001:2000 - Updated 2003. Certification of the system was obtained by BSI Quality Assurance on 9th December 1991, Number RS13732.






ALL WARRANTIES COVER REEL ONLY AND EXCLUDE ANY HOSE SUPPLIED.

RETRACTA SPRING REWIND RANGE

Redashe Retractable spring rewind hose reels offer performance, reliability and versatility for all popular hose applications. Constructed in high impact UV stabilised polypropylene for all-purpose corrosion free durability, Retractable reels can be installed indoors or out. Each reel is supplied with fitted hose and a choice of lockable mounting brackets for wall, floor, bench or overhead installation.

- Tough, corrosion free polypropylene construction
- Supplied with fitted hose for specified application
- Choice of lockable mounting brackets
- Latching or free run of hose
- Lightweight - average just 10kg, easy to install
- Full automatic hose rewind for neat and tidy storage
- Low effort easy-to-use rewind tension
- Virtually maintenance free

REELS - SUPPLIED COMPLETE WITH HOSE

	PART NO.	HOSE LENGTH	HOSE ID	WORKING PRESSURE	INLET SIZE	HOSE OUTLET	PRICE
	<i>FOR COMPRESSED AIR - RED REEL - Reinforced PVC Hose</i>						
	AR100	56 ft	3/8"	230 PSI	3/8" BSPF	1/4" BSPM	£196.56
	AR200	40 ft	1/2"	230 PSI	3/8" BSPF	3/8" BSPM	£217.36
	<i>FOR COLD WASH 40°C - BLUE REEL - Reinforced PVC Hose</i>						
	CW100	50 ft	1/2"	150 PSI	3/8" BSPF	Bare Hose	£217.36
	<i>FOR HOT WASH 90°C - RED REEL - Reinforced Rubber Hose</i>						
	HW100	40 ft	1/2"	150 PSI	3/8" BSPF	3/8" BSPM	£238.16
	<i>FOR PROPANE - RED REEL - Reinforced Rubber Hose</i>						
	HW100P	50 ft	3/8"	300 PSI	3/8" BSPF	3/8" BSPM	£234.00
	<i>FOR FOOD QUALITY WATER 95°C - RED REEL - Reinforced Rubber Hose</i>						
	FQ100	40 ft	1/2"	300 PSI	3/8" BSPF	1/2" BSPM	£300.56





COXREEL STAINLESS STEEL REELS

Stainless Steel Spring Rewind Reel. Constructed in heavy gauge 304 stainless steel and other non-corroding materials. Designed for use in harsh, corrosive environments or where hygiene is of primary importance.

- Heavy duty 304 stainless steel construction
- Double supported solid 1" stainless steel axle
- Latching of hose at any length
- All working parts fully accessible for servicing
- Fully automatic hose rewind for neat and tidy storage
- Multi-position roller arm gives full range of mounting options
- Four direction non-sag roller guides reduce hose wear
- 1/4" stainless steel mounting base for maximum stability
- Slotted and drilled mounting holes for easy installation
- Externally mounted full-flow swivel for maximum product delivery

HEAVY DUTY STEEL SPRING REWIND



PART NO.	HOSE CAPACITY			MAXIMUM PRESSURE	SWIVEL IN / OUT	PRICE
	I.D.	O.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>						
SHL450SS	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£772.72
<i>Air / Water</i>						
SHL450SSAW	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£812.24
<i>Diesel</i>						
SHL450SSD	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£861.12
<i>Food Industry</i>						
SHL450SSF	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£882.96

COXREEL STEEL REELS

Heavy duty hose reels engineered for rugged durability. Constructed in 'heavy gauge' powder coated steel for maximum strength and reliability, providing years of trouble free service with minimum maintenance.

- Heavy duty steel construction with durable blue powder finish
- Double supported solid 1" steel axle
- Multi-position roller arm gives full range of mounting options
- Four direction non-sag roller guides reduce hose wear
- 1/4" steel mounting base for maximum stability
- Slotted and drilled mounting holes for easy installation

HEAVY DUTY STEEL SPRING REWIND



PART NO.	HOSE CAPACITY			MAXIMUM PRESSURE	SWIVEL IN / OUT	PRICE
	I.D.	O.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>						
PLPL350	3/8"	5/8"	50 ft	300 PSI	3/8" BSPF	£248.56
SHL3100	3/8"	5/8"	100 ft	300 PSI	3/8" BSPF	£526.24
SHL450	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£324.48
SHL4100	1/2"	7/8"	100 ft	300 PSI	1/2" BSPF	£573.04
SHL550	3/4"	1.1/8"	50 ft	300 PSI	3/4" BSPF	£602.16
SHL635	1"	1.7/16"	35 ft	300 PSI	1" NPTF	£650.00
<i>Air / Water</i>						
PLPL350AW	3/8"	5/8"	50 ft	300 PSI	3/8" BSPF	£279.76
SHL450AW	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£364.00
SHL4100AW	1/2"	7/8"	100 ft	300 PSI	1/2" BSPF	£643.76
SHL550AW	3/4"	1.1/8"	50 ft	300 PSI	3/4" BSPF	£662.48
SHL635AW	1"	1.7/16"	35 ft	300 PSI	1" NPTF	£716.56
<i>Diesel</i>						
SHL450D	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£411.84
SHL4100D	1/2"	7/8"	100 ft	300 PSI	1/2" BSPF	£634.40
SHL550D	3/4"	1.1/8"	50 ft	300 PSI	3/4" BSPF	£694.72
SHL635D	1"	1.7/16"	35 ft	300 PSI	1" NPTF	£750.88
<i>Food Industry</i>						
SHL450F	1/2"	7/8"	50 ft	300 PSI	1/2" BSPF	£434.72
SHL4100F	1/2"	7/8"	100 ft	300 PSI	1/2" BSPF	£788.32
SHL550F	3/4"	1.1/8"	50 ft	300 PSI	3/4" BSPF	£787.28
<i>Pressure Wash</i>						
MPL3100P	3/8"	5/8"	100 ft	3000 PSI	3/8" BSPF	£825.76



COXREEL STEEL REELS

Coxreel "Competitor" hand crank reels are designed for industrial applications where longer lengths of hose are required. Constructed in heavy gauge powder coated steel. These power rewind reels combine the necessity of long hose lengths with the convenience of automatic rewind.

- Swivel joint: Permits reel to rotate smoothly while connected to the fluid source. Brass and steel are used as standard for swivel joint inlets on Series 1125 models. Aluminium and steel are used as standard for swivel joint inlets on Series 1175 models.
- Discs: Heavy gauge steel with rolled edges to add strength and eliminate hose damage
- Lock pin and tension brake: Standard on hand crank models

HEAVY DUTY STEEL MANUAL REWIND



Series 1125
also available with power rewind



Series 1175
shown with optional extra power rewind

PART NO.	HOSE CAPACITY			MAXIMUM PRESSURE	SWIVEL IN / OUT	PRICE
	I.D.	O.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>						
11254200	1/2"	7/8"	200 ft	3000 PSI	1/2" BSPF	£291.20
11255100	3/4"	1.1/4"	100 ft	3000 PSI	3/4" BSPF	£326.56
11756100	1"	1.7/16"	100 ft	3000 PSI	1" NPTF	£444.08
<i>Air / Water</i>						
11254200AW	1/2"	7/8"	200 ft	3000 PSI	1/2" BSPF	£420.16
11255100AW	3/4"	1.1/4"	100 ft	3000 PSI	3/4" BSPF	£425.36
11756100AW	1"	1.7/16"	100 ft	3000 PSI	1" NPTF	£599.04
<i>Diesel</i>						
11255100D	3/4"	1.1/4"	100 ft	3000 PSI	3/4" BSPF	£498.16
11756100D	1"	1.7/16"	100 ft	3000 PSI	1" NPTF	£704.08
<i>Oil</i>						
11255100O	3/4"	1.1/4"	100 ft	3000 PSI	3/4" BSPF	£695.76

E-ZY REEL - 701 / 705 SERIES

- Lightweight and durable, just 12.5 kgs
- Constructed in high-impact UV stabilised polypropylene
- Supplied with fitted PVC hose for immediate installation
- Fully assembled, includes 3 ft connecting hose
- Suitable for compressed air and water

SPRING REWIND HOSE REELS



PART NO.	HOSE CAPACITY		MAXIMUM PRESSURE	MAXIMUM TEMPERATURE	PRICE
	I.D.	LENGTH			
C705100	1/4"	33 ft	180 PSI	60°C	£64.48
C705200	5/16"	25 ft	180 PSI	60°C	£70.72
C701100	3/8"	50 ft	300 PSI	60°C	£96.72
C701200	1/2"	50 ft	300 PSI	60°C	£108.16

E-ZY REEL - 605 SERIES

- Compact, lightweight design
- Supplied with 15m of 3 core, 1.5mm cable
- Fitted inlet cable for connection to supply
- Integral wall mounting swivel bracket
- Latching of cable at any length
- Fully automatic spring rewind
- Low effort, easy to use rewind tension
- Virtually maintenance free

SPRING REWIND CABLE REEL



PART NO.	CABLE LENGTH	NO. OF CORES	VOLTAGE	AMPS IN / OUT	PRICE
C605100	50 ft	3 x 1.5mm	240v	3 / 10	£53.04



E-ZY REEL - 808 SERIES

- Corrosion resistant powder coating • Guide arm adjustable handling up to 9 positions • Multi-position ratchet lock

SPRING REWIND REELS - SUPPLIED COMPLETE WITH HOSE



PART NO.	HOSE CAPACITY I.D.	LENGTH	MAXIMUM PRESSURE	INLET / OUTLET	PRICE
LOW PRESSURE AIR / WATER REELS					
C808350L	3/8"	50 ft	300 PSI	3/8"	£175.76
C808450L	1/2"	50 ft	300 PSI	1/2"	£203.84
MEDIUM PRESSURE AIR / WATER REELS					
C808350M	3/8"	50 ft	2250 PSI	3/8"	£239.20
C808450M	1/2"	50 ft	2000 PSI	1/2"	£267.28

E-ZY REEL - 808 STAINLESS STEEL SERIES

- Ideal for food processing, washdown, chemical transfer and industrial solvent handling • Four non-snap rollers reduce hose wear

SPRING REWIND REEL - SUPPLIED WITHOUT HOSE



PART NO.	HOSE CAPACITY I.D.	LENGTH	MAXIMUM PRESSURE	INLET / OUTLET	PRICE
LOW PRESSURE STAINLESS STEEL REEL					
CSS808450L	1/2"	50 ft	300 PSI	1/2"	£322.40

E-ZY REEL - 809 SERIES

- Heavy duty steel construction with corrosion resistant powder coating • 6.1/2" wide L-shaped base ensures stable support
- Guide arm adjustable for handling up to 9 positions • Multi-position ratchet lock • Spring fully enclosed and lubricated
- Wall, ceiling, or floor mounted

SPRING REWIND REEL - SUPPLIED COMPLETE WITH HOSE



PART NO.	HOSE CAPACITY I.D.	LENGTH	MAXIMUM PRESSURE	INLET / OUTLET	PRICE
LOW PRESSURE AIR / WATER REELS					
C809325L	3/8"	25 ft	300 PSI	3/8"	£195.52

E-ZY REEL - 880 SERIES

- Non-snap roller guides reduce hose wear • Latching of hose at any length • Corrosion resistant powder coated finish, black as standard
- Full flow internal swivel assembly, ensures maximum product delivery • Suitable for floor, wall, ceiling or vehicle mount
- Fully automatic hose rewind for neat and tidy storage

SPRING REWIND REELS - SUPPLIED COMPLETE WITH HOSE



PART NO.	HOSE CAPACITY I.D.	LENGTH	MAXIMUM PRESSURE	INLET / OUTLET	PRICE
LOW PRESSURE AIR / WATER REELS					
C8804100L	1/2"	100 ft	300 PSI	1/2"	£393.12
C880550L	3/4"	65 ft	300 PSI	3/4"	£420.16
C880650L	1"	50 ft	300 PSI	1"	£431.60



E-ZY REEL - 208 SERIES

- Constructed from tubular & formed steel for superior strength & durability
- Corrosion resistant powder coated finish, black as standard
- Full flow, brass swivel assembly, ensures max. product delivery
- Suitable for floor, wall, workbench mounting, ideal for mobile applications
- Spring loaded lock pin prevents hose from de-reeling

MANUAL REWIND REELS



PART NO.	HOSE CAPACITY		MAXIMUM PRESSURE	INLET / OUTLET	PRICE
	I.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>					
C2083100H	3/8"	100 ft	3000 PSI	3/8"	£87.36
C208465H	1/2"	65 ft	3000 PSI	1/2"	£87.36

E-ZY REEL - 420 SERIES

- Designed for industrial applications where longer length of hose is required
- Constructed with heavy gauge powder coated steel
- Adjustable drag brake, full flow swivel joint
- Open hose slot drum design, removable crank handle
- Spring loaded lock pin prevents hose from de-reeling

MANUAL REWIND REELS




PART NO.	HOSE CAPACITY		MAXIMUM PRESSURE	INLET / OUTLET	PRICE
	I.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>					
C4203300L	3/8"	300 ft	3000 PSI	3/8"	£112.32
C4204100L	1/2"	150 ft	3000 PSI	1/2"	£114.40

E-ZY REEL - 460 SERIES

- Designed for applications where longer lengths of hose are required
- Constructed in heavy gauge powder coated steel
- Full flow swivel joint
- Open hose slot drum design, Oil-lite self-lubricating bearings
- Spring loaded lock pin prevents hose from de-reeling

MANUAL REWIND REELS



PART NO.	HOSE CAPACITY		MAXIMUM PRESSURE	INLET / OUTLET	PRICE
	I.D.	LENGTH			
<i>Bare Reel - supplied without hose</i>					
C4603350H	3/8"	350 ft	3000 PSI	3/8"	£122.72
C4604270H	1/2"	270 ft	3000 PSI	1/2"	£125.84